



The high-efficiency boiler of Mark

The Mark ECOFLEX is a very compact and sustainable high-efficiency boiler for industrial use. Available in the following capacities: 168 kW, 210 kW, 252 kW and 294 kW.


The ECOFLEX is suitable to heat offices, garages, warehouses, apartment buildings, workshops, distribution centers and showrooms.

For a complete heating solution from Mark it is also possible to combine the ECOFLEX boiler with water-supplied products such as the TANNER MDA and INFRA AQUA ECO.

Benefits


- Competitive pricing
- Proven and innovative technology
- Cast aluminum heat exchanger
- Robust
- Low-noise
- Advanced diagnostic system
- Very low maintenance interval
- Low service interval
- Integrated pump control
- Closed version available
- Cascade control already integrated
- Weather-dependant control
- Control:
 - On/off thermostat
 - OpenTherm
 - BMS 0-10V control

Dimensions

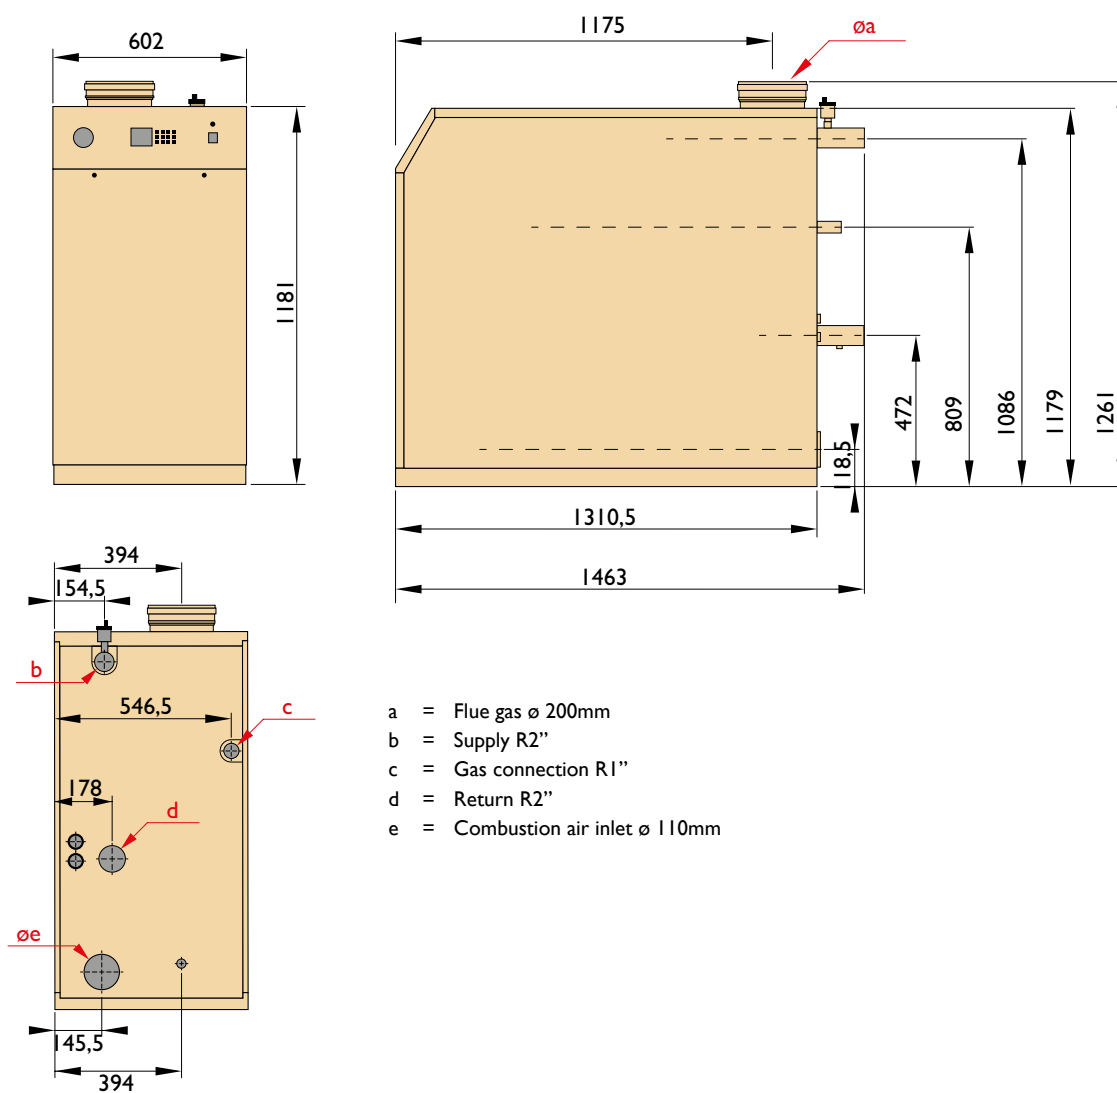

Technical information

ECOFLEX		HR 168	HR 210	HR 252	HR 294
Nominal input 80/60 °C	kW	32,6-163,6	42-204,5	50,4-245,4	58,8-282,5
Efficiency	%	107	107	107,5	107,5
Operating pressure	bar	6	6	6	6
Weight	kg	193	210	227	244
Supply voltage		230V 1F ~50 Hz			

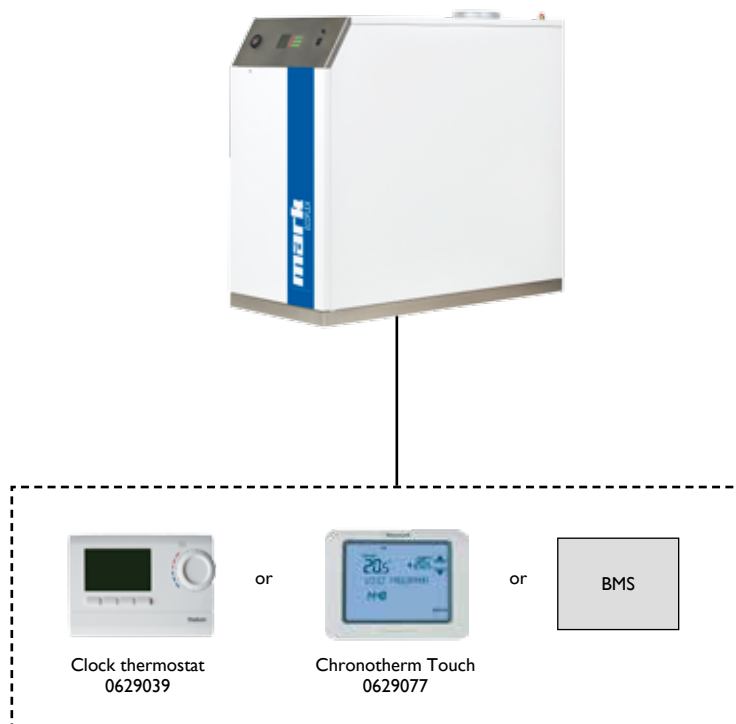

Prices Mark ECOFLEX

PRODUCT - ECOFLEX - NATURAL GAS G25



Code nr.	Description	Price
5970005	EcoFlex HR 168	€ 8385
5970006	EcoFlex HR 210	€ 10099
5970007	EcoFlex HR 252	€ 13885
5970008	EcoFlex HR 294	€ 16591

Other gas types on request.

ACCESSOIRES - CONTROLS



Code nr.	Description	Price
0629077	Chronotherm Touch (modulating) thermostat	€ 254
0629039	Clock thermostat (IA)	€ 327

Circulation pump on request